




AP17 Hardware Installation Guide

Overview

The AP17 contains four IEEE 802.11be radios that deliver up to 2x2 MIMO with two spatial streams when operating in multi-user (MU) or single-user (SU) mode. The AP17 can operate simultaneously in the 6GHz band, 5GHz band, and 2.4GHz band along with a dedicated tri-band scan radio.

I/O ports

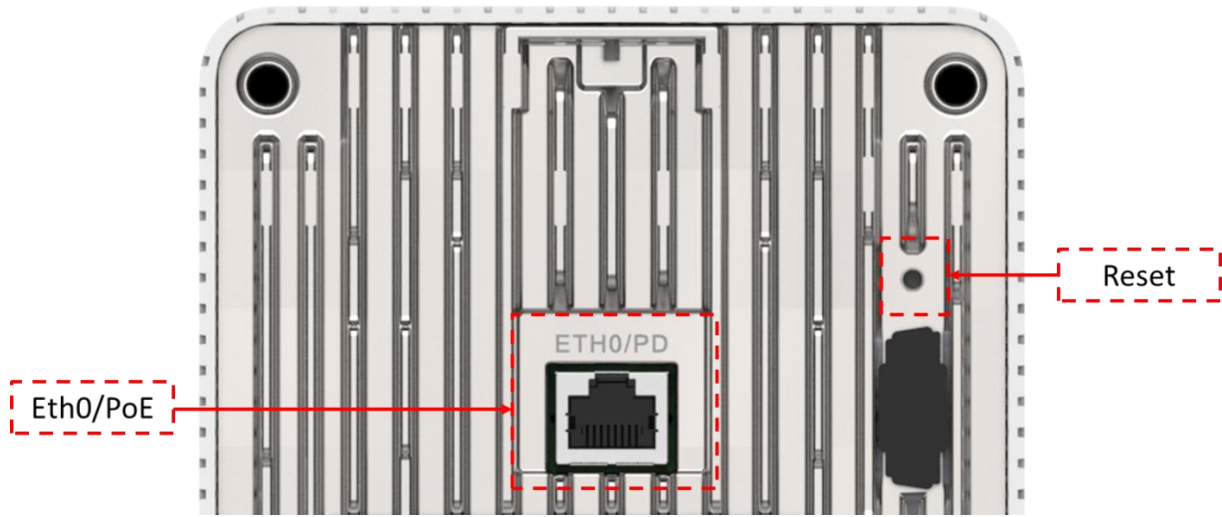

Reset	Reset to the factory default settings
Eth0+PoE	100BASE-T or 1/2.5/5/10GBASE-T RJ45 interface that supports 802.3bt PoE PD
Eth1+PSE	10/100/1000BASE-T RJ45 interface with 802.3af PSE out (enabled with 802.3bt PoE input on Eth0)
Eth2-Eth3	10/100/1000BASE-T RJ45 interfaces

Technical Specifications:

Feature	Description
Power options	802.3bt/802.3at PoE
Dimensions	120mm x 160mm x 55mm (4.72in x 6.30in x 2.17in)
Weight	0.8 kg (1.76 lbs)
Operating temperature	0° to 40° C
Operating humidity	10% to 90% maximum relative humidity, non-condensing
Operating altitude	3,048m (10,000 ft)
I/O	1 - 100BASE-T or 1/2.5/5/10GBASE-T auto-sensing RJ-45 with PoE In 1 - 10/100/1000BASE-T auto-sensing RJ-45 with PoE Out 2 - 10/100/1000BASE-T auto-sensing RJ-45
RF	6GHz - 2x2:2SS 802.11be MU-MIMO & SU-MIMO 5GHz - 2x2:2SS 802.11be MU-MIMO & SU-MIMO 2.4GHz - 2x2:2SS 802.11be MU-MIMO & SU-MIMO 2.4GHz / 5GHz / 6GHz scanning radio 2.4GHz BLE with Omni Antenna 802.15.4: dual radio (zigbee and thread)
Maximum PHY rate	Total maximum PHY rate - 9334 Mbps 6GHz - 5764 Mbps 5GHz - 2882 Mbps 2.4GHz - 688Mbps
Indicators	Multi-color status LED
Compliance standards	CAN/CSA-C22.2 No. 62368-1-14 FCC Part 15.247, 15.407, 15.107, and 15.109 RSS-247 ICES-003 (Canada)

Warranty Information

The AP17 Access Point comes with a limited lifetime warranty.

Ordering Information:

Access Points

AP17-US	802.11be 2+2+2 Wall Plate AP – Internal Antenna for the US Regulatory domain
AP17-WW	802.11be 2+2+2 Wall Plate AP – Internal Antenna for the WW Regulatory domain

Accessories

APBR-WP2	Bracket for AP17

Regulatory Compliance Information:

This product and all interconnected equipment must be installed indoors within the same building, including the associated LAN connections as defined by the 802.3 Standard.

If you need further assistance with purchasing the power source, please contact Juniper Networks, Inc.

FCC Requirement for Operation in the United States of America:

FCC Guideline for Human Exposure

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution

- Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.
- This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
- This device is restricted for indoor use.
- The 5.925 ~ 7.125GHz operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet.
- Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or Communications with unmanned aircraft systems.

Industry Canada

This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil contient des émetteurs / récepteurs exempts de licence qui sont conformes au (x) RSS (s) exemptés de licence d'Innovation, Sciences et Développement économique Canada. L'opération est soumise aux deux conditions suivantes:

- (1) Cet appareil ne doit pas provoquer d'interférences.
- (2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.

The antenna height shall be determined by the installer or operator of the standard-power access point or fixed client device, or by automatic means. This information shall be stored internally in the device. Provision of accurate device information is mandatory.

La hauteur de l'antenne doit être déterminée par l'installateur ou l'opérateur du point d'accès à puissance standard ou de l'appareil client fixe, ou par des moyens automatiques. Ces informations doivent être stockées en interne dans l'appareil. La fourniture d'informations précises sur l'appareil est obligatoire.

Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

IC Caution

- (i) The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
- (ii) Operation shall be limited to indoor use only.
- (iii) Devices shall not be used for control of or communications with unmanned aircraft systems.
- (iv) Devices shall not be used on oil platforms.
- (v) Devices shall not be used on aircraft, except for the low-power indoor access points, indoor subordinate devices, low-power client devices, and very low-power devices operating in the 5925-6425 MHz band, that may be used on large aircraft as defined in the Canadian Aviation Regulations, while flying above 3,048 metres (10,000 feet).
- (vi) Devices shall not be used on automobiles.

- (vii) Devices shall not be used on trains.
- (viii) Devices shall not be used on maritime vessels.

Avertissement

- (i) les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;
- (ii) Utilisation limitée à l'intérieur seulement.
- (iii) *Les appareils ne doivent pas être utilisés pour contrôler ou communiquer avec des systèmes d'aéronefs sans pilote.*
- (iv) *Les appareils ne doivent pas être utilisés sur les plates-formes pétrolières.*
- (v) *Les appareils ne doivent pas être utilisés sur les avions, à l'exception des points d'accès intérieure à faible puissance, des dispositifs subordonnés intérieurs, des dispositifs clients de faible puissance et des dispositifs de très faible puissance fonctionnant dans la bande 5925-6425 MHz, qui peut être utilisée sur de grands avions tel que défini dans la réglementation de l'aviation canadienne, tout en volant au-dessus de 3 048 mètres (10 000 pieds).*
- (vi) *Les appareils ne doivent pas être utilisés sur les automobiles.*
- (vii) *Les appareils ne doivent pas être utilisés dans les trains.*
- (viii) *Les appareils ne doivent pas être utilisés sur les navires maritimes.*



Hereby, Juniper Networks, Inc. declares that the radio equipment types (AP17) is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following:

<https://www.mist.com/support/>

The frequency and maximum transmitted Power in EU:

Evaluation Mode	Frequency range (MHz)	EIRP power limit (dBm)
2.4GHz WLAN	2400 – 2483.5	20
5GHz WLAN B1	5150 – 5250	23
5GHz WLAN B2	5250 – 5350	23
5GHz WLAN B3	5470 – 5725	30
5GHz WLAN B4 (EN 300 440 V2.2.1)	5725 – 5825	13.98
6GHz WLAN (EN 303 687)	5945 – 6425	LPI : 23
Bluetooth	2400 – 2483.5	20
IEEE 802.15.4 (Zigbee and thread)	2400 – 2483.5	20

This equipment complies with EU radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

The product is for use by authorized professionals and in environments where the product has been assessed for safe and compliant operation. The installer is responsible for ensuring that the equipment meets all local safety requirements for the installed location. For products not certified for use in Hazardous Locations, the equipment is not suitable for use in explosive environments, in the presence of flammable liquids, near explosives, or in areas where blasting is occurring.

The device is restricted to indoor use only when operating in 5150 to 5350 MHz and 5945 to 6425MHz frequency ranges.

	AT	BE	BG	CZ	DK	EE	FR	DE	IS
	IE	IT	EL	ES	CY	LV	LI	LT	LU
	HU	MT	NL	NO	PL	PT	RO	SI	SK
	TR	FI	SE	CH	HR	UK(NI)			

UK

Hereby, Juniper Networks, Inc. declares that the radio equipment types (AP17) is in compliance with Radio Equipment Regulations 2017.

The full text of the UK declaration of conformity is available at the following:

<https://www.mist.com/support/>


The frequency and maximum transmitted Power in UK:

Evaluation Mode	Frequency range (MHz)	EIRP power limit (dBm)
2.4GHz WLAN	2400 – 2483.5	20
5GHz WLAN B1	5150 – 5250	23
5GHz WLAN B2	5250 – 5350	23
5GHz WLAN B3	5470 – 5725	30
5GHz WLAN B4	5725 – 5850	23
6GHz WLAN	5925 – 6425	LPI : 23.98
Bluetooth	2400 – 2483.5	20
IEEE 802.15.4 (Zigbee and thread)	2400 – 2483.5	20

This equipment complies with UK radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

The product is for use by authorized professionals and in environments where the product has been assessed for safe and compliant operation. The installer is responsible for ensuring that the equipment meets all local safety requirements for the installed location. For products not certified for use in Hazardous Locations, the equipment is not suitable for use in explosive environments, in the presence of flammable liquids, near explosives, or in areas where blasting is occurring.

The device is restricted to indoor use only when operating in 5150 to 5350 MHz and 5925 to 6425MHz frequency ranges.



Taiwan

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。應避免影響附近雷達系統之操作。

Paraguay

En Paraguay, este equipo deberá ser configurado para operar con las limitaciones establecidas en la Norma Técnica NTC-RF-5925:2025 de la CONATEL.

Brazil

Este equipamento não tem direito a proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados. Este produto não é apropriado para uso em ambientes domésticos, pois poderá causar interferências eletromagnéticas que obrigam o usuário a tomar medidas necessárias para minimizar essas interferências.